


4-Gang Curtain Module(KNX)

Product Introduction

This 4-gang curtain Module provides manual control, scheduled execution, and real-time status monitoring, serving as a foundational element of home automation. Its precise control and user-friendly operation ensures a comfortable, efficient, and smart curtain management experience.

Features

- Manual switch control
- Delayed opening/closing
- Power-off memory
- Inverted output capability

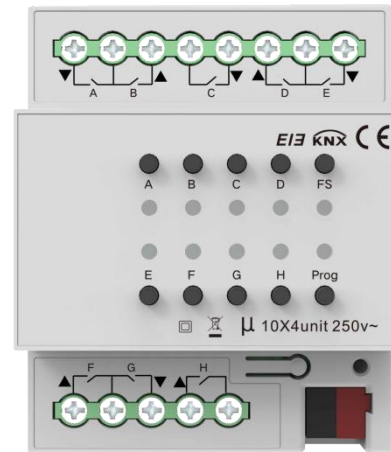

Specification

- Model Number: KXAC-B1C4
- Input Voltage: 21 ~ 30VDC, powered via bus
- Communication Protocol: KNX
- Output Switching Current:


Compliant with AC1 (EN60947-4-1) for resistive loads, 10A/230V

Compliant with AC3 (EN60947-4-1) for capacitive loads, 10A/230V

Compliant with EN60669 for fluorescent lamp loads, 10A/230V

- Communication Protocol: KNX
- Rated Voltage: 250V/440VAC, 50/60Hz
- Single Channel Load Limit: Max 2300W
- Operating Temperature: -5 ~ 45 °C
- Operating Humidity: 0 ~ 93% RH (non-condensing)
- Product Dimensions: 72×90×64 mm
- Certification: CE

Wiring Diagram

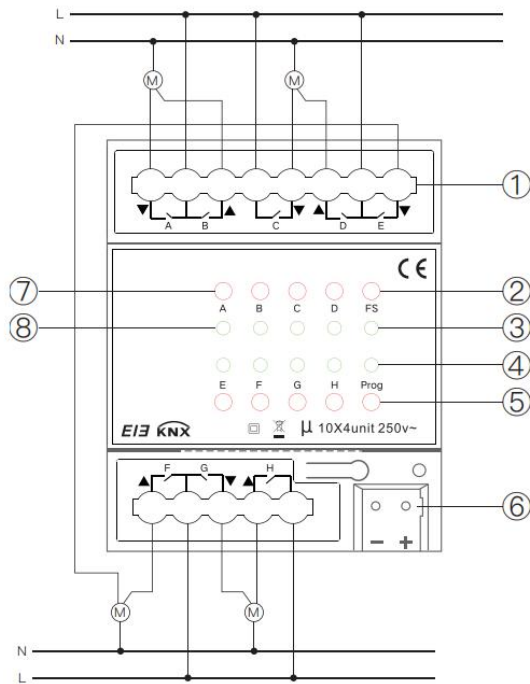

Description:

- ① Output/Load Terminals
- ② Manual/Automatic Mode Toggle Button
- ③ Manual/Automatic Mode Indicator Light
- ④ Programming LED Indicator, green LED for physical address programming status
- ⑤ Programming Button
- ⑥ KNX Wiring Terminals
- ⑦ Relay Control Button
- ⑧ Relay Status Indicator Light

Product Dimension Diagram (mm)

